


MEDO BLOWER Series

Model **LA-28B/LA-45C/LA-60B/LA-80B/LA-100A/LA-120A/LA-200F**

Features
linear-motor-driven
free piston system



Extra Large Type
LA-200F



Large Type
LA-100A / LA-120A



Medium Type
LA-60B / LA-80B



Compact Type
LA-28B / LA-45C

Benefits include

- Low sound level
- Easy maintenance
- Outstanding performance and lifetime
- Weatherproof case IP55*
- Low running temperature

*The IP rating of LA-60B & LA-80B is IP54.

Model	LA-28B	LA-45C	LA-60B	LA-80B	LA-100A	LA-120A	LA-200F
Power Supply	230 V AC*	230 V AC*	230 V AC*	230 V AC 240 V AC	230 V AC*	230 V AC 240 V AC	230 V AC 240 V AC
Rated Frequency	50 Hz						
Rated Pressure	0.11 bar (1.56 psig)		0.15 bar (2.13 psig)		0.18 bar (2.56 psig)		0.20 bar (2.84 psig)
Operating Pressure Range	0.05 to 0.2 bar (0.71 to 2.84 psig)				0.05 to 0.3 bar (0.71 to 4.27 psig)		0.1 to 0.3 bar (1.42 to 4.27 psig)
Rated Airflow	28 L/min	45 L/min	60 L/min	80 L/min	100 L/min	120 L/min	200 L/min
Power Consumption	29 W	47 W	64 W	86 W	100 W	130 W	195 W
Weight	2.8 kg (6.4 Lbs)	3.2 kg (7.1 Lbs)	5.0 kg (11 Lbs)	5.3 kg (11.7 Lbs)	9.7 kg (21.4 Lbs)		13.5 kg (29.8 Lbs)

*Please contact us for 240 V AC model.


Air Flow Characteristics

— 50Hz



External Dimensions (Unit: mm)

Compact Type

LA-28B

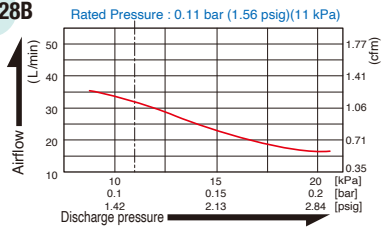


LA-45C

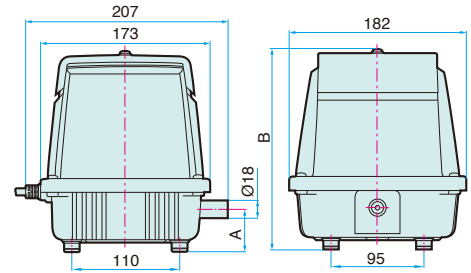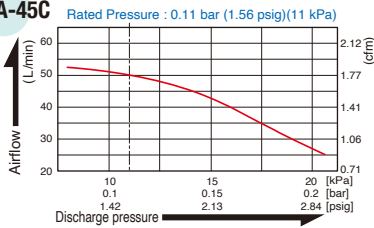


A : 44 mm (LA-28B), 47.5 mm (LA-45C)
B : 205 mm (LA-28B), 208.5 mm (LA-45C)

Medium Type

LA-60B


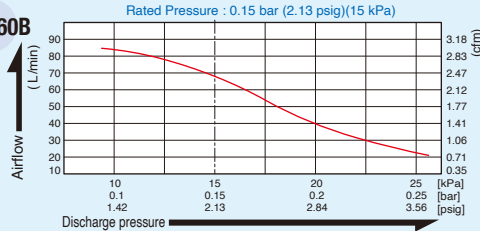


LA-80B


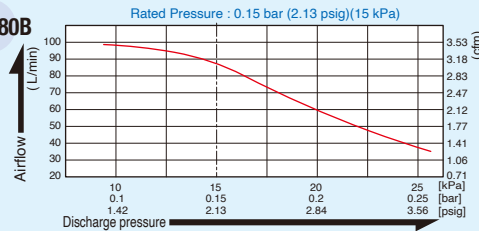


Large Type

LA-100A

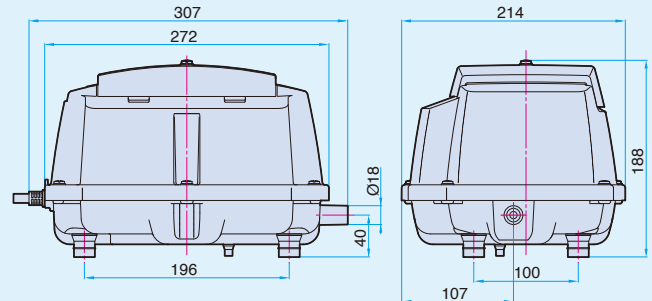
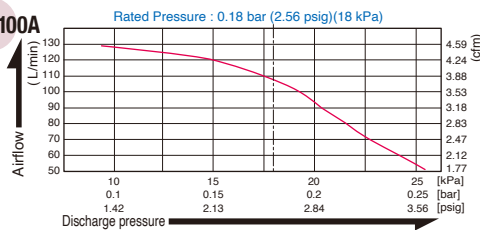


LA-120A

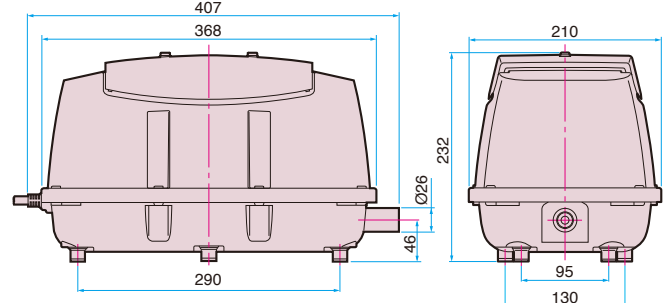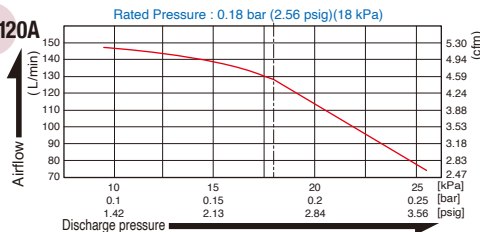

Extra Large Type

LA-200F

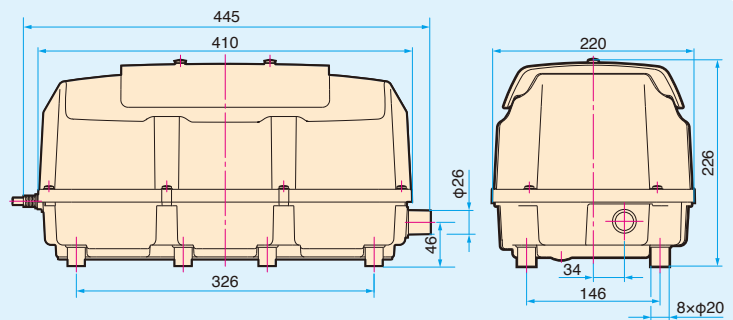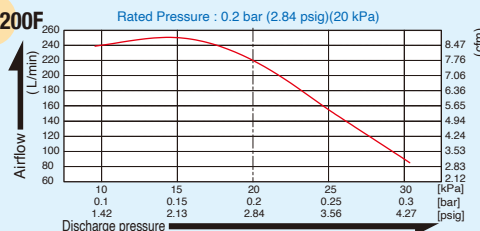

NITTO KOHKI CO., LTD.

Web www.nitto-kohki.co.jp/e/

Head Office

2-9-4, Nakaikegami, Ota-ku, Tokyo 146-8555, Japan
Tel : +81-3-3755-1111 Fax : +81-3-3753-8791
E-mail : overseas@nitto-kohki.co.jp



DISTRIBUTED BY